



MAXTER CLADDING CONCEPT

Stamboliyski 4210, PO Box 19, 5 Klokotnitsa Str., <http://maxter-cc.com/>

TECHNICAL SPECIFICATION – GRANITE®SILKY MAT:

Granite®Silky Mat presents textures in variation of metallic and mat colours, which will give a unique aesthetics of your project. The available palette is so unique that it has a protected design with OHMI.

PARAMETERS

Nominal thickness of organic coating	35 up to 40 µm
--------------------------------------	----------------

Clemen scratch test	≥ 1,5 kg
---------------------	----------


Resistance to cracking	T-bend ≤ 2 T
------------------------	--------------

SVHC – substances of Very High Concern included in the annex XIV of REACH regulation	exempt
--	--------

Corrosion resistance – salt spray test	RC3/RC4
--	---------

UV resistance (QUV test)	2000 hours (ISO 4892-3), category RUV3 according to EN 10169
--------------------------	--

Fire classification	A1 according to EN13501-1
---------------------	---------------------------




Colours:

Granite®Silky Mat is offered with two finishes: Category 1 – Smooth and slightly grained, Category 2 – slightly sparking rough finish.

Category 1



CONCRETE

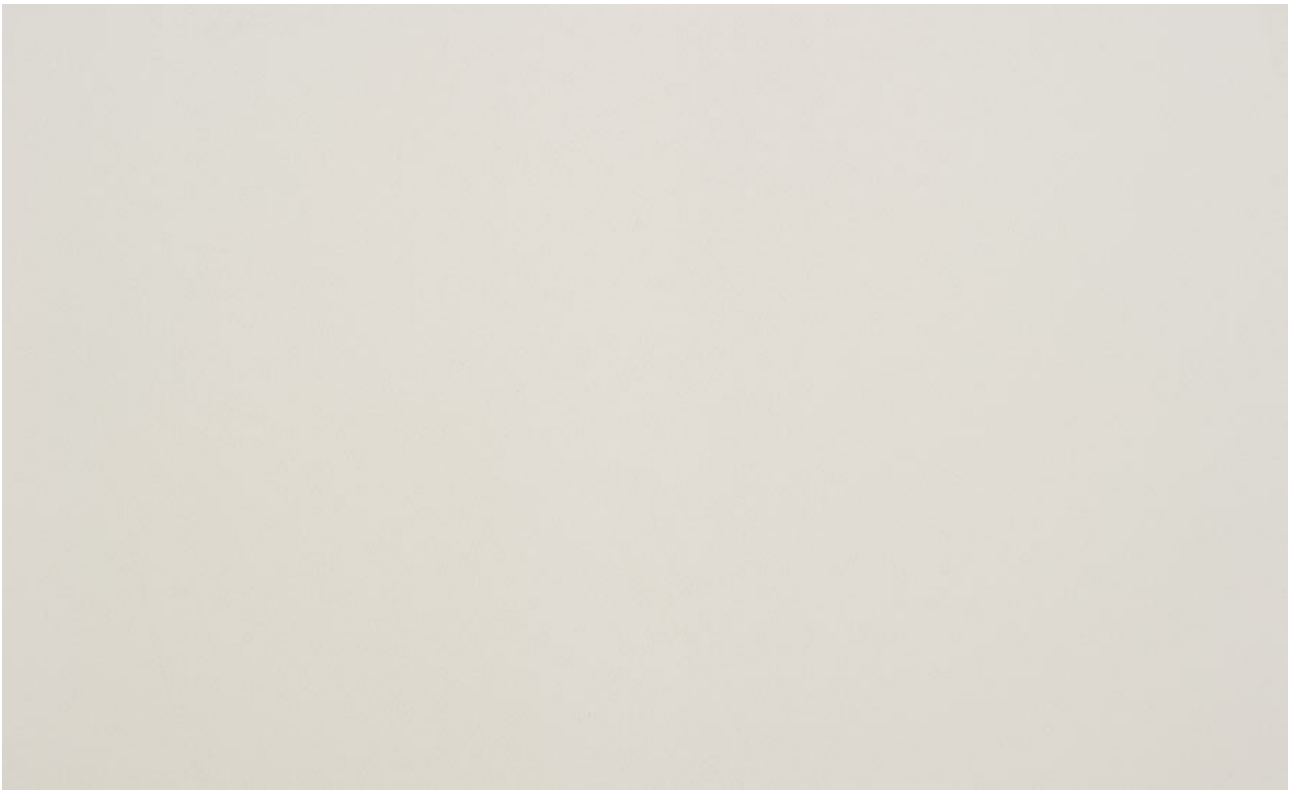

CHALK




SAND



GRAPHITE

Category 2

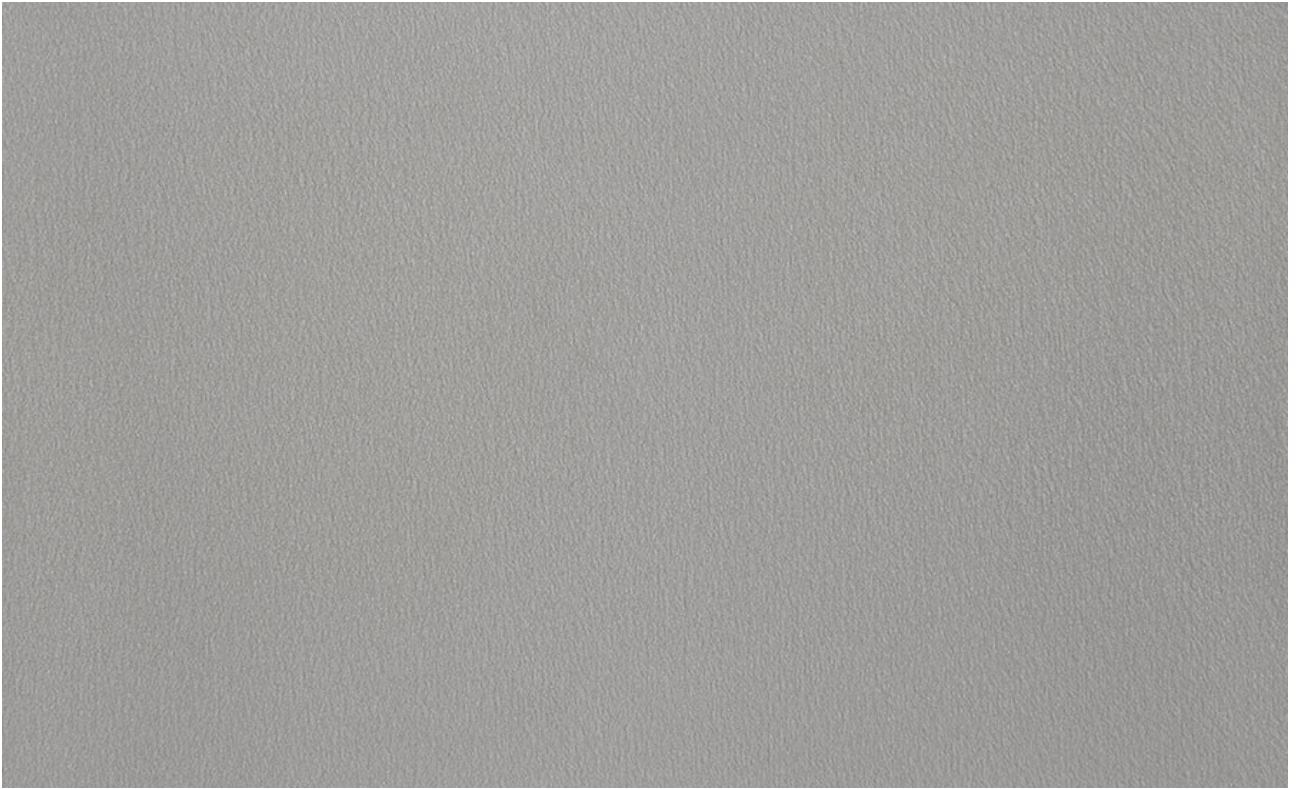


ANTHRACITE




OAK




MOUSE

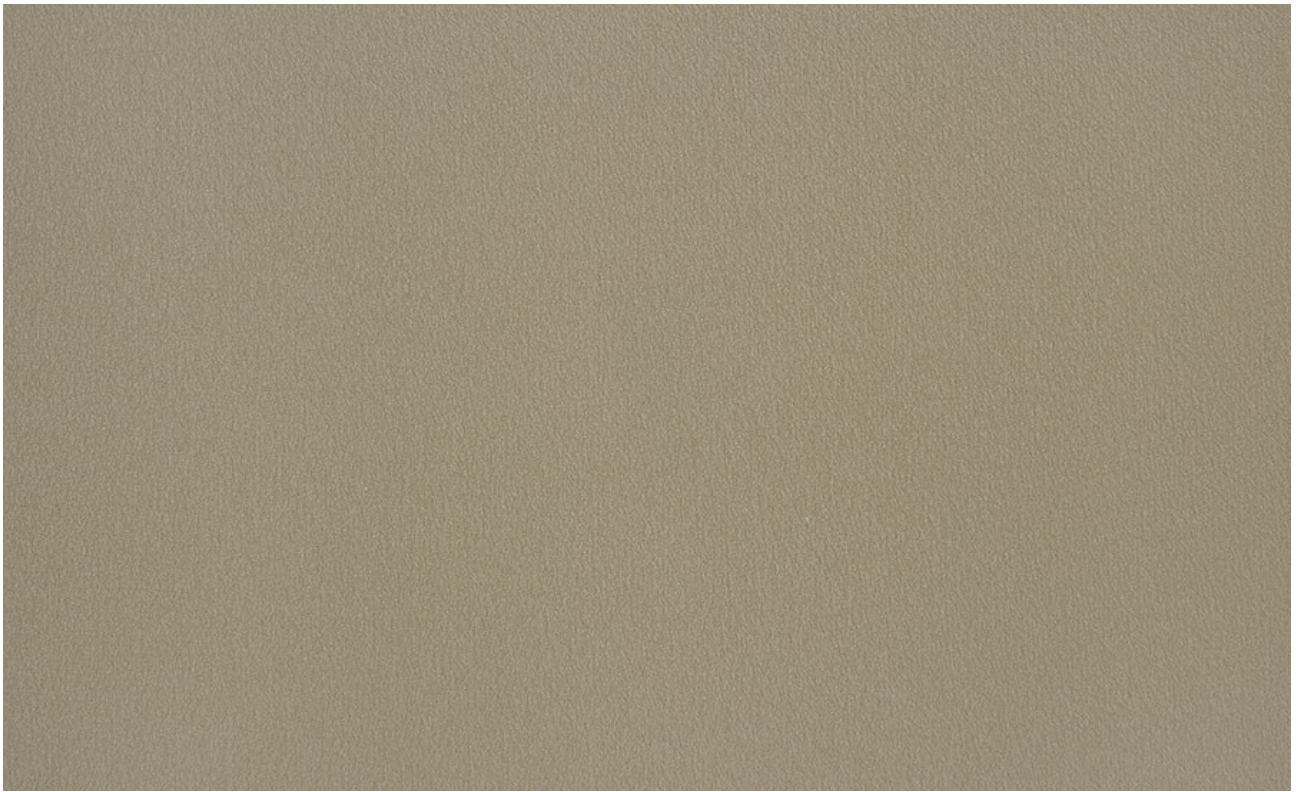

BRASS

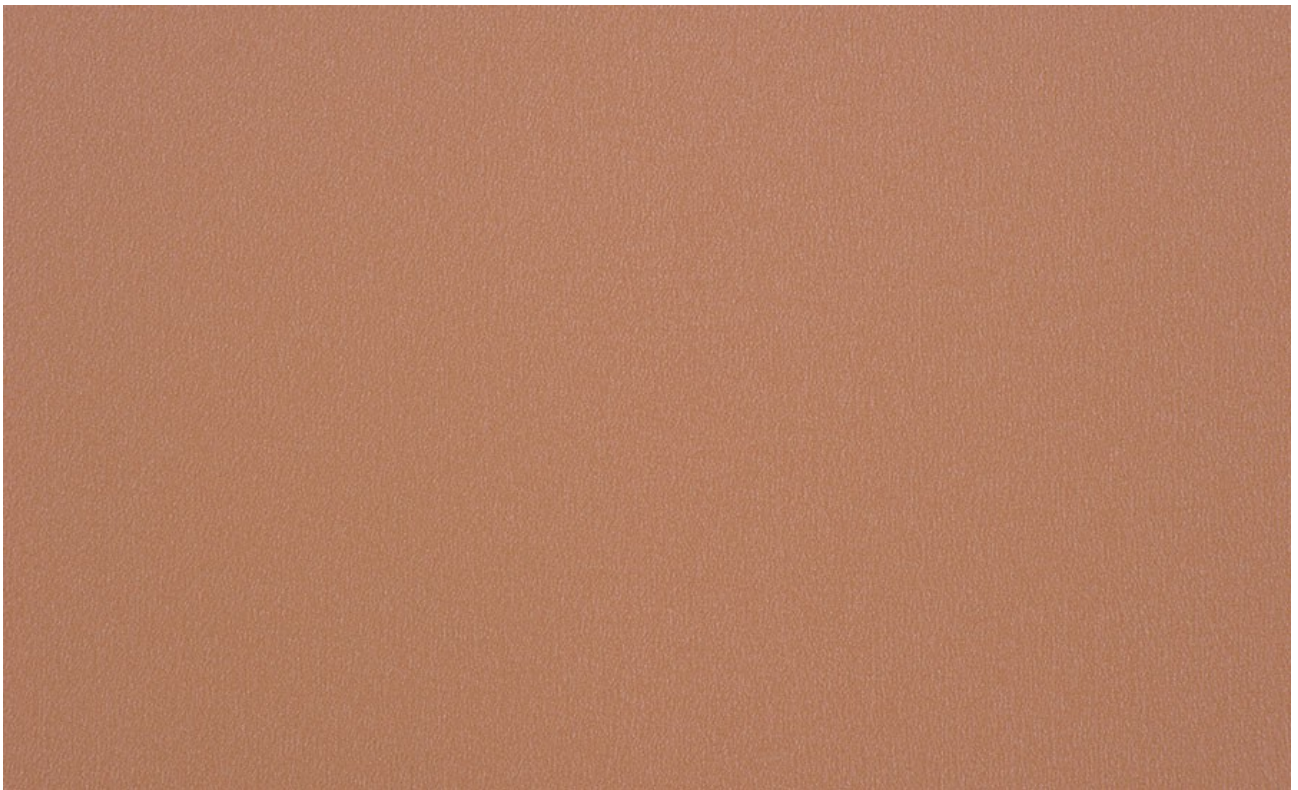

TERRA

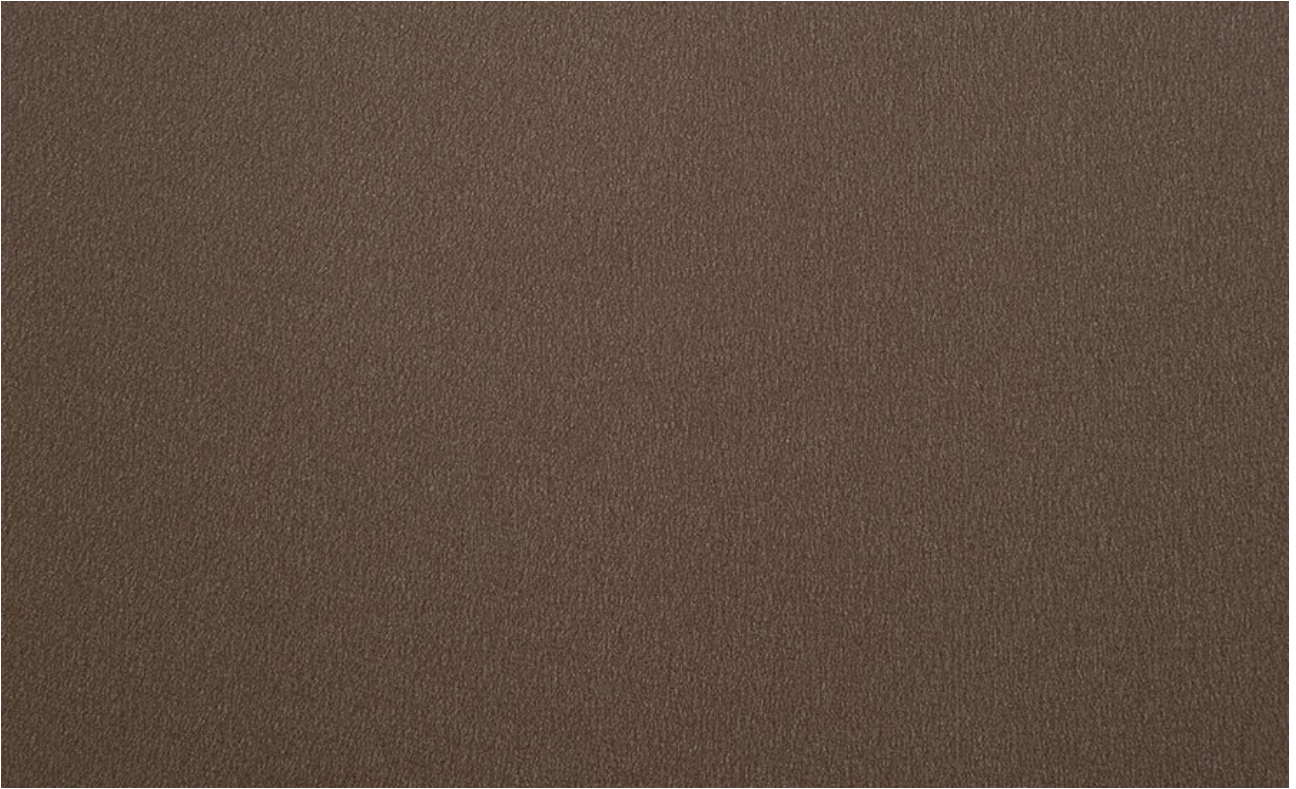

MET INK

For additional info please visit: www.industry.arcelormittal.com