



MAXTER CLADDING CONCEPT

Stamboliyski 4210, PO Box 19, 5 Klokotnitsa Str., <http://maxter-cc.com/>

TECHNICAL SPECIFICATION – GRANITE®IMPRESSION:

GRANITE®Impression is the real proof that you can have the nature feel on your building facade with the use of organic coated steel. The textures and patterns of this product allow MCC ventilated facade to achieve that. The product comes with 15 years automatic guarantee

PARAMETERS


Nominal thickness of organic coating	35 to 50 µm
Finish	Smooth or textured
Adhesion of the coating (T-bend)	≤ 1 T
Cracking resistance (T-bend)	≤ 2 T
Corrosion resistance/Salt spray test	360 hours RC3 category as per EN10169
Resistance to condensation	1000 hours
UV resistance (QUV test)	2000 hours (ISO 4892-3), category RUV3 as per EN10169



Fire resistance

A1 acc to EN13501-1

Colours:


AGATE – SMOOTH FINISH

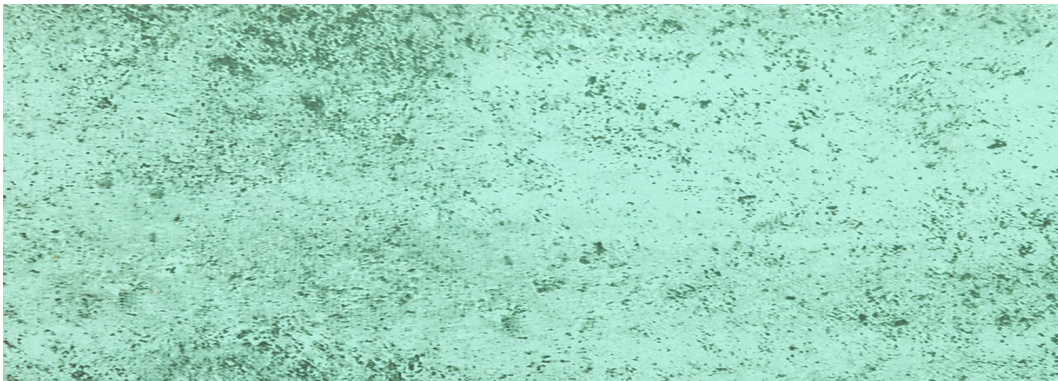


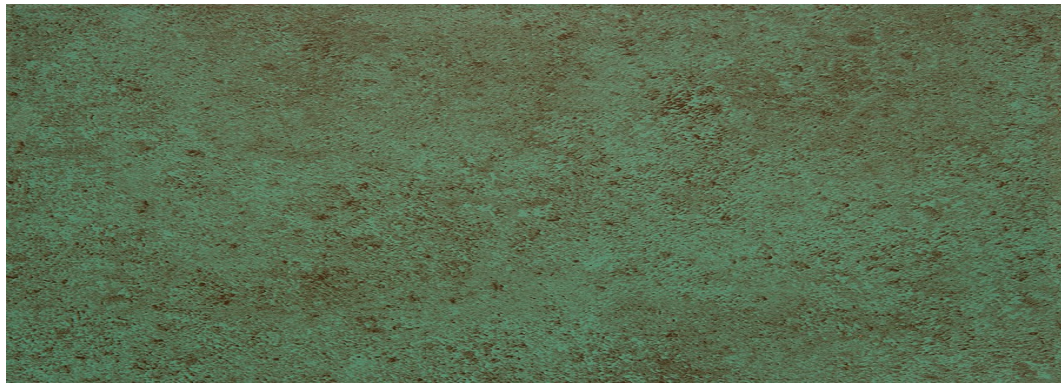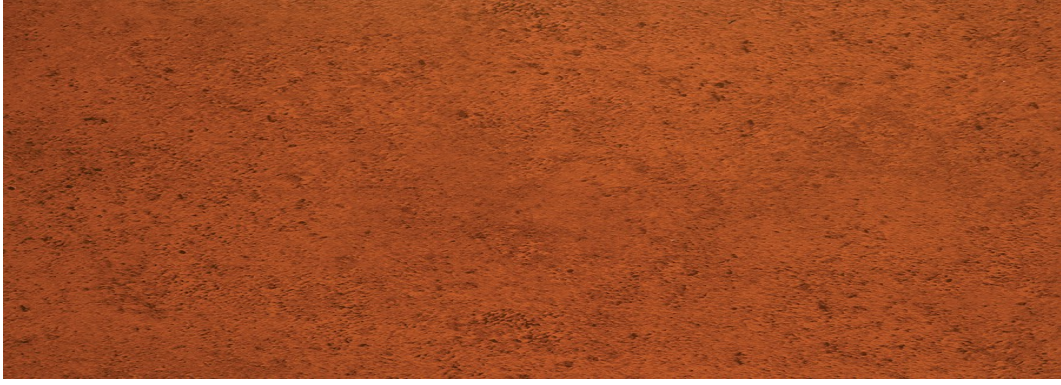



WOOD – SMOOTH FINISH

MOGANO




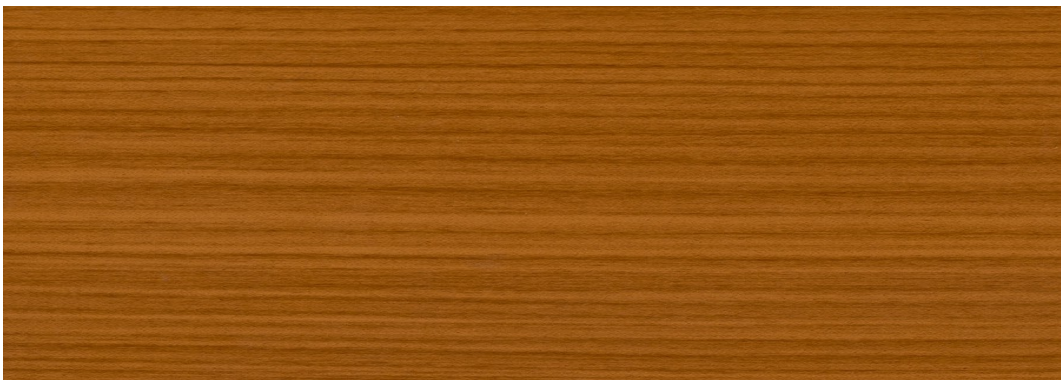


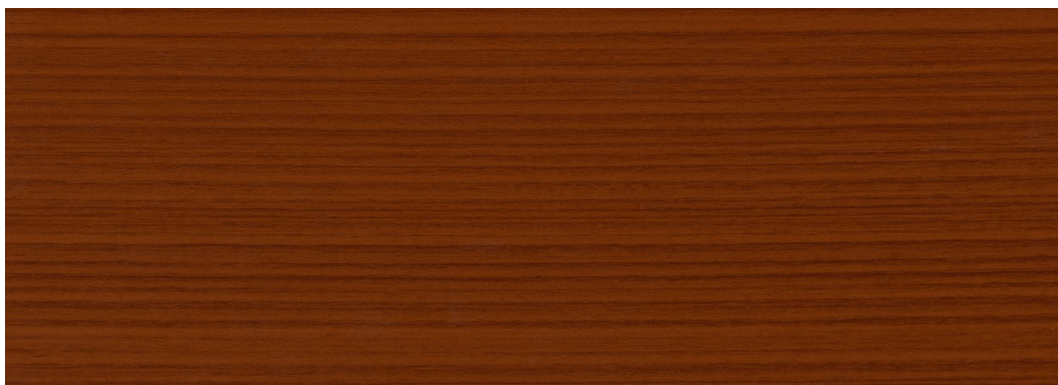

NOCE

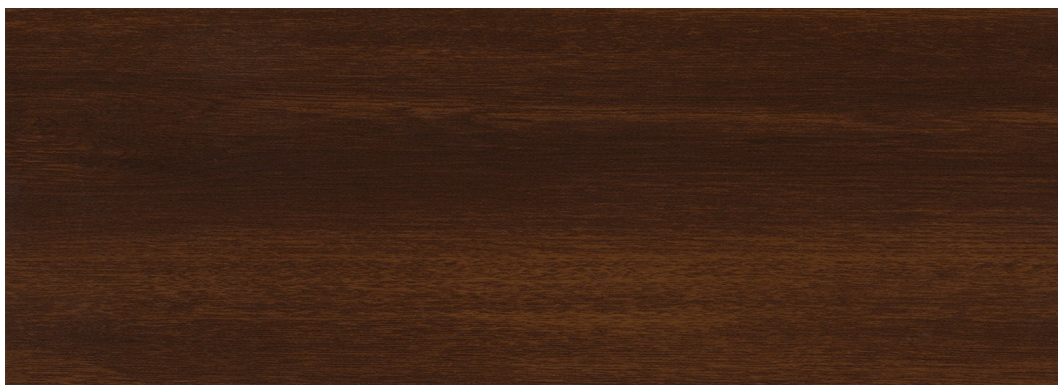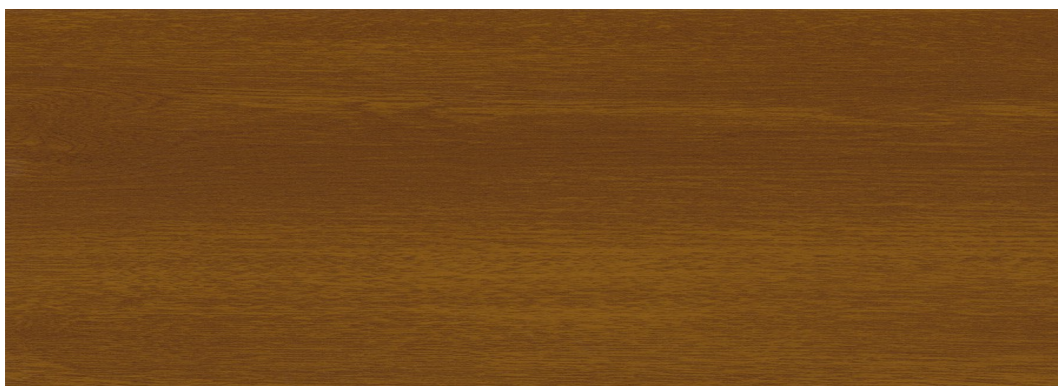


PALISANDER

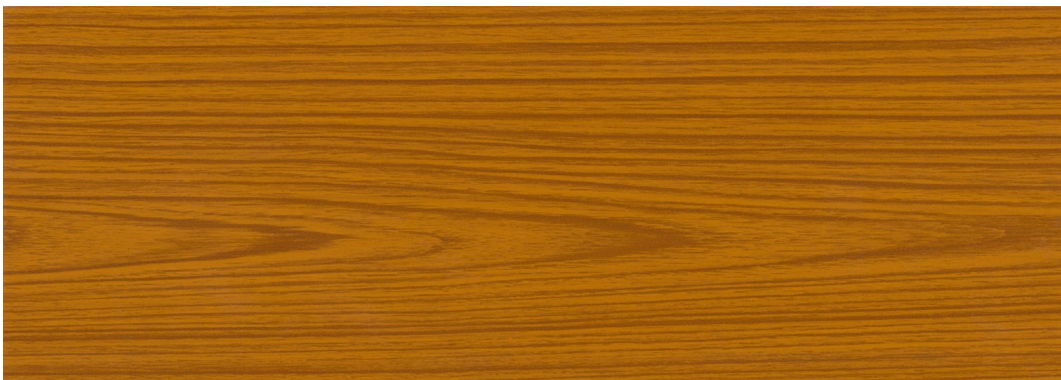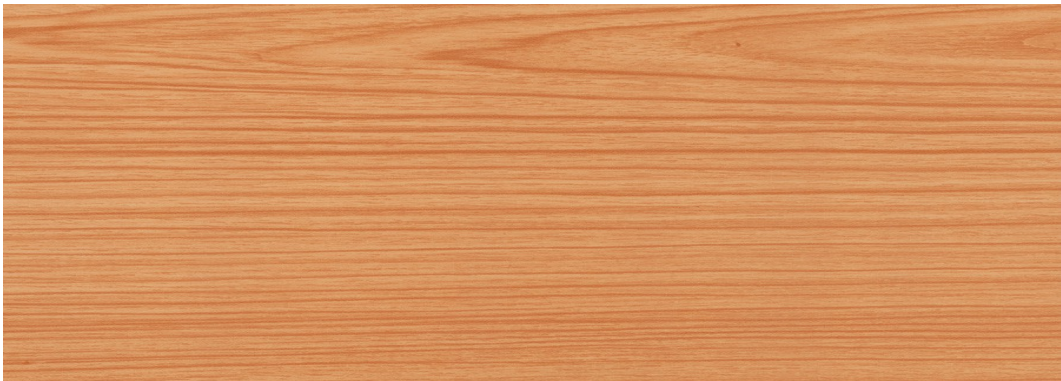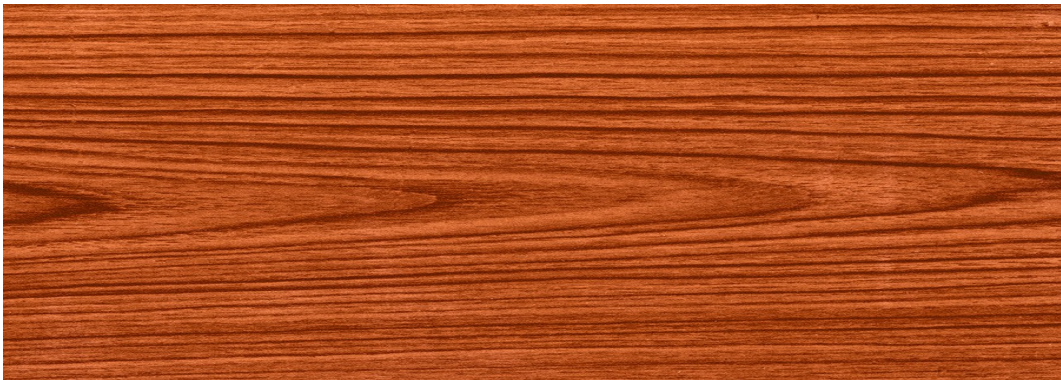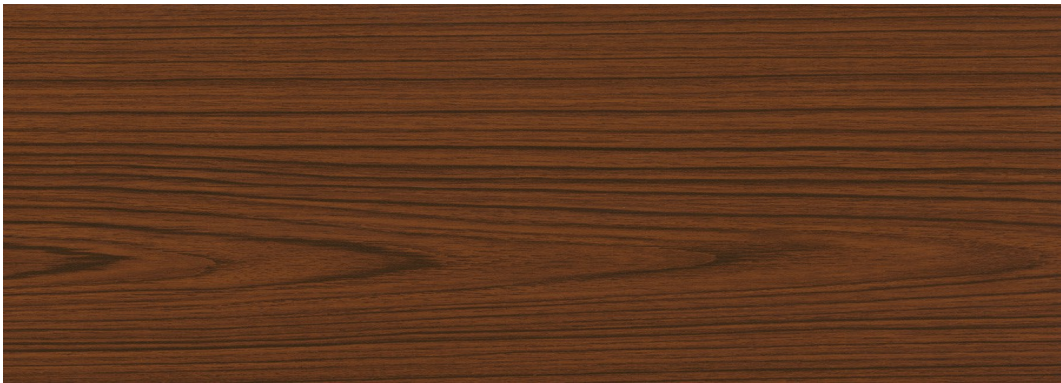

OAK



SNAKE - 3D EFFECT - TEXTURED

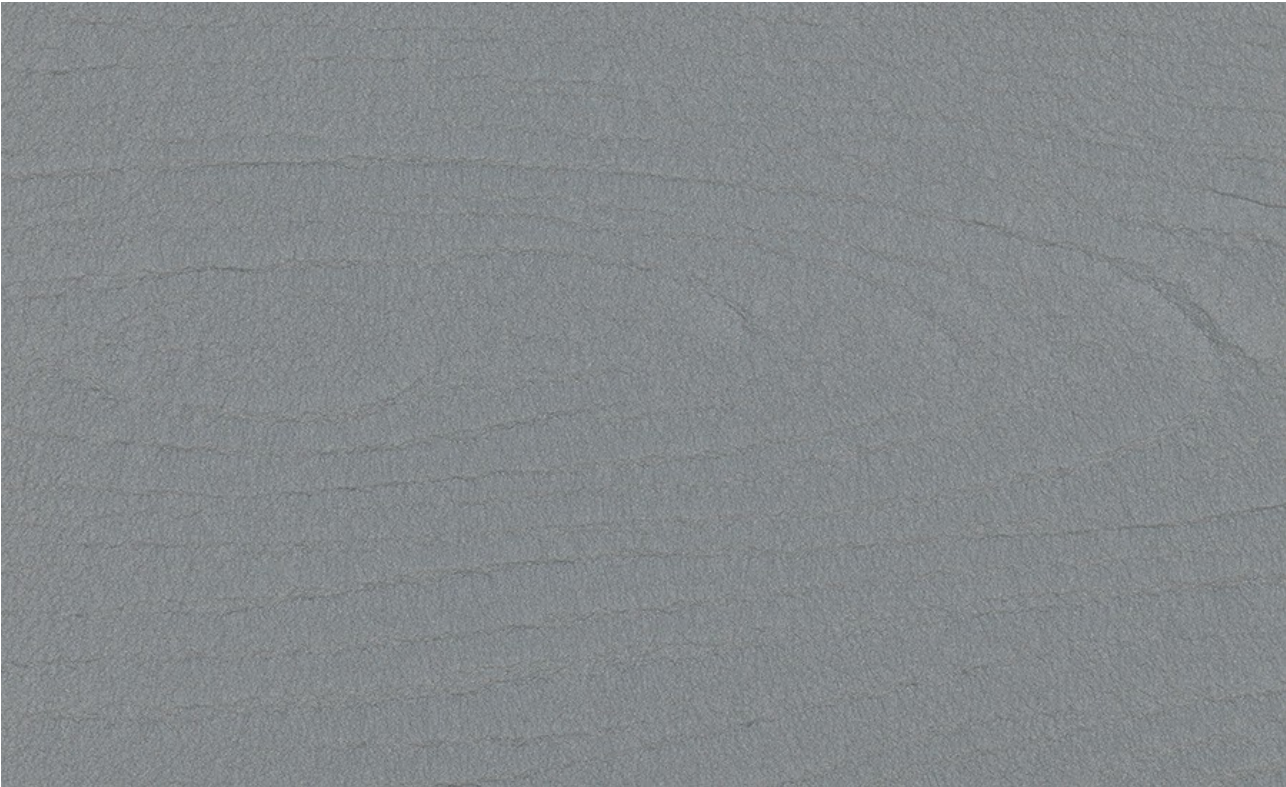

ELEPHANT - 3D EFFECT - TEXTURED



For additional info please visit: www.industry.arcelormittal.com