



MAXTER CLADDING CONCEPT

Stamboliyski 4210, PO Box 19, 5 Klokotnitsa Str., <http://maxter-cc.com/>

TECHNICAL SPECIFICATION – GRANITE®Deep Mat:

Granite®Deep Mat is offered in rich colour variety in deep mat wrinkled finish. The product is offered with 15 years automatic guarantee by Arcelor Mittal


PARAMETERS

Nominal thickness of organic coating	35µm
Clemen scratch test	≥ 1,5kg
Fire classification	A1 according to EN13501-1
Resistance to cracking (T-bend)	≤ 1 T
Surface Adhersion resistance (T-bend)	≤ 2T
Corrosion resistance – salt spray test	360 hours EN10169 - categoryRC3
Condensation resistance (QCT)	1000 hours (ISO 6270)

UV resistance (QUV test)

2000 hours (ISO 4892-3), category RUV3
according to EN 10169


Colours:

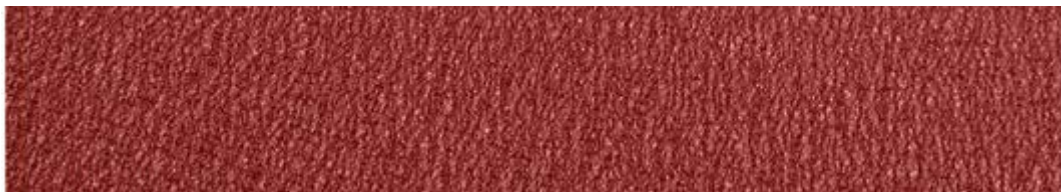

Brown red




Chocolate brown

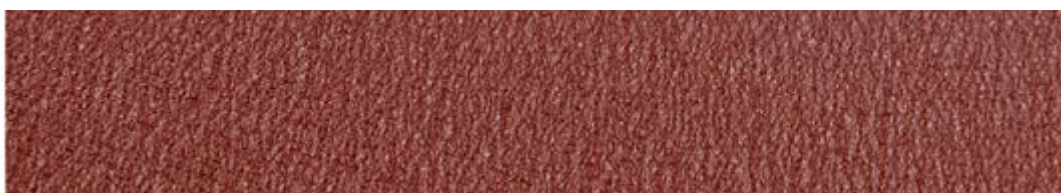

Oxide red



Wine red

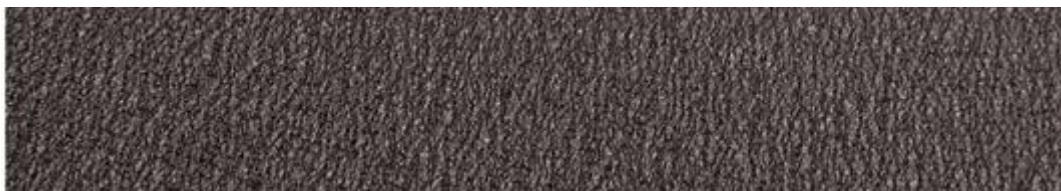


Grey brown



Chrome green



Moss green

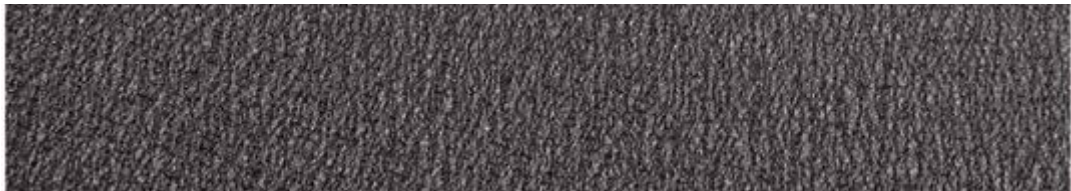

Graphite grey



Jet black

For additional info please visit: www.industry.arcelormittal.com