



MAXTER CLADDING CONCEPT

Stamboliyski 4210, PO Box 19, 5 Klokotnitsa Str., <http://maxter-cc.com/>

TECHNICAL SPECIFICATION – GRANITE®SILKY SHINE:

Granite®Silky Shine gives a luxurious feeling of any building through its high-gloss appearance. It's been developed under a strict control in order to meet all facade production requirements such as scratch resistance, form-ability and easiness to clean. The product comes with 15 year automatic guarantee. A longer one can be provided upon request.

PARAMETERS

Nominal thickness of coating

50 µm

Clemen scratch resistance

≥ 2,5 кг

Corrosion resistance class

RC4

SVHC – substances of Very High Concern included in the annex XIV of REACH regulation

exempt


UV resistance (QUV test)

RUV4


Fire classification

A1 според EN13501-1


Colours:

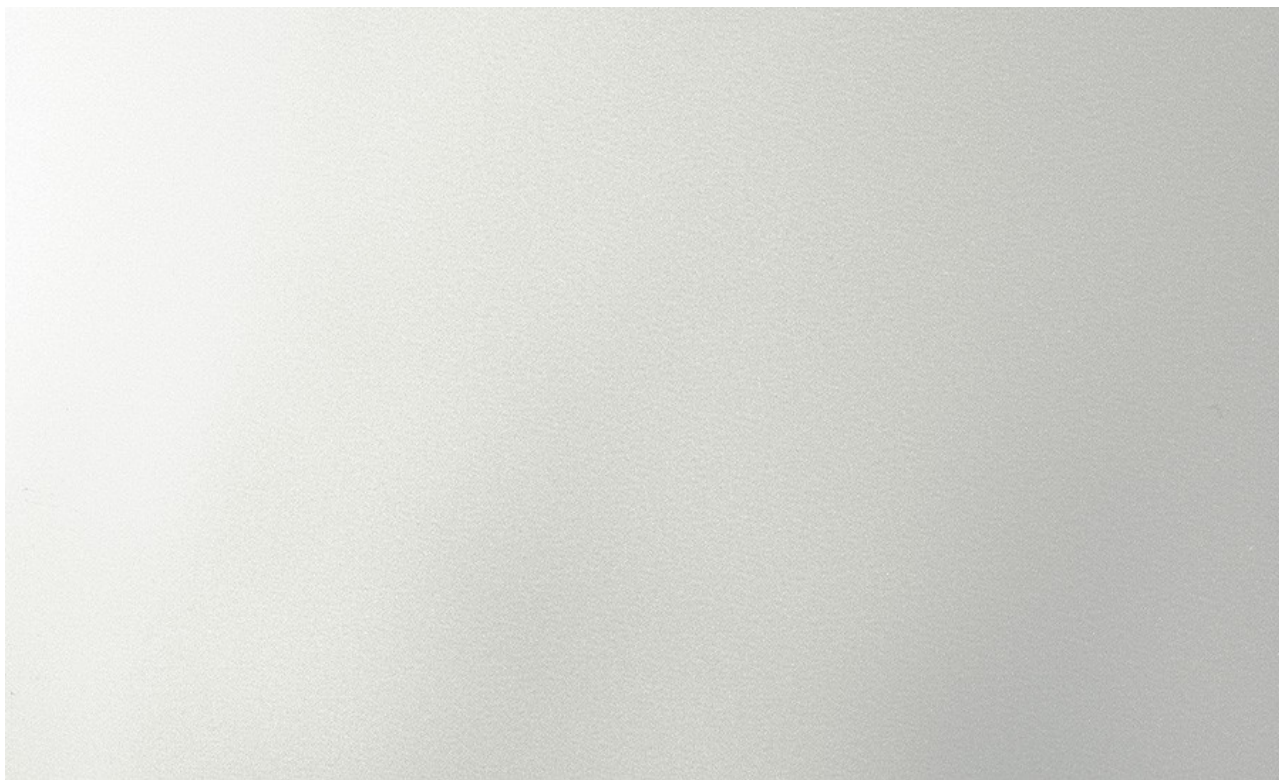


SNOW

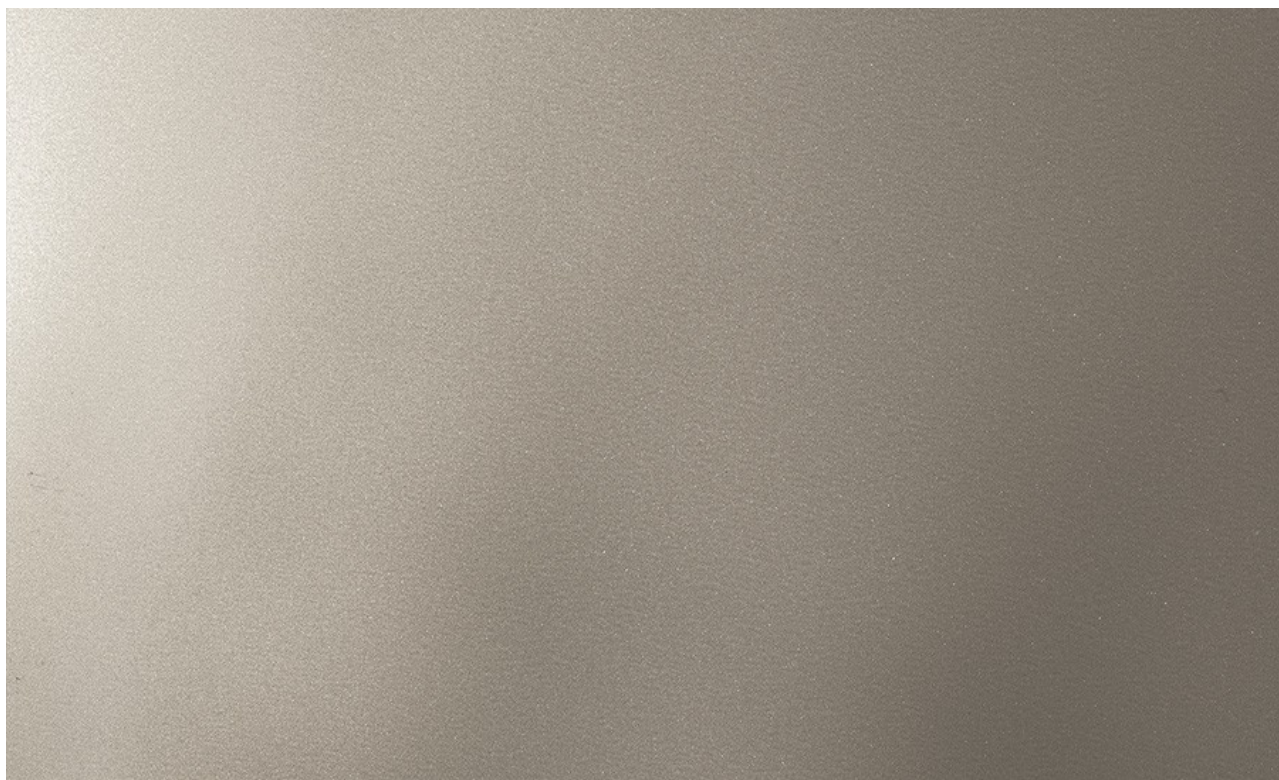

CHROME

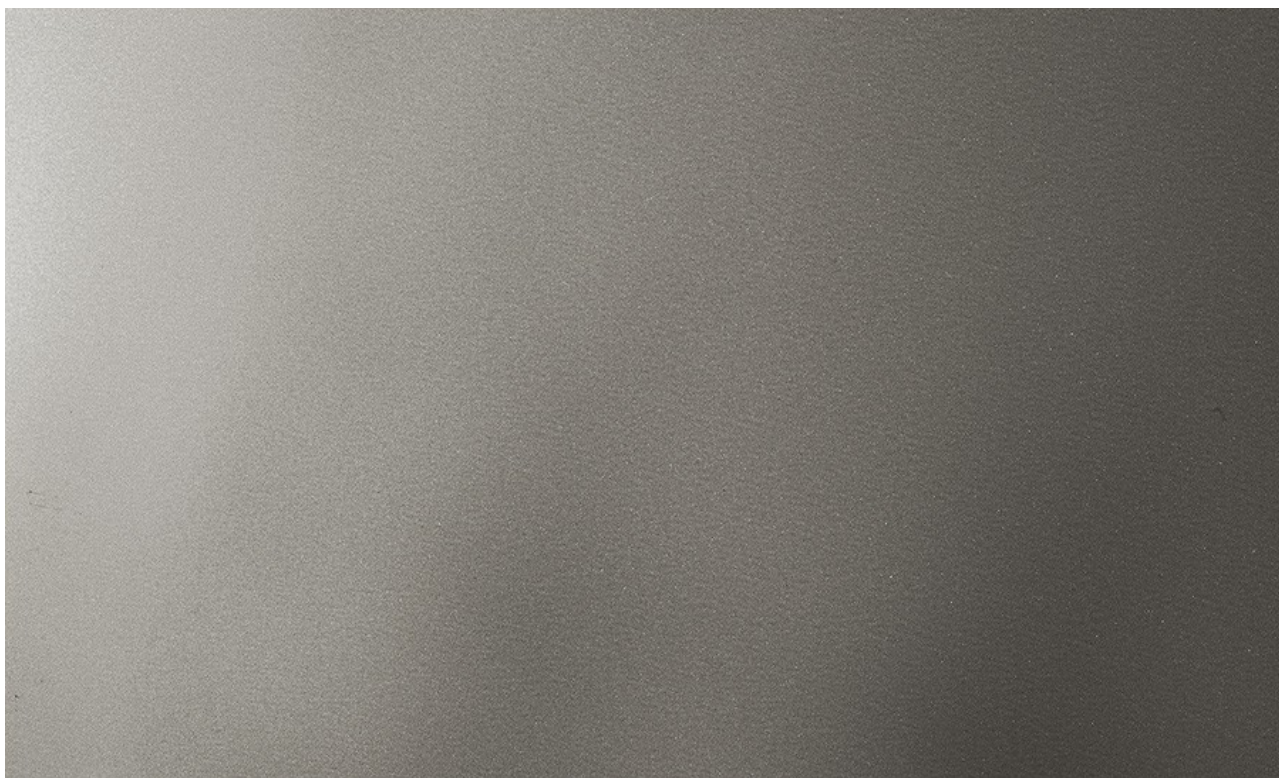


HERMATITE

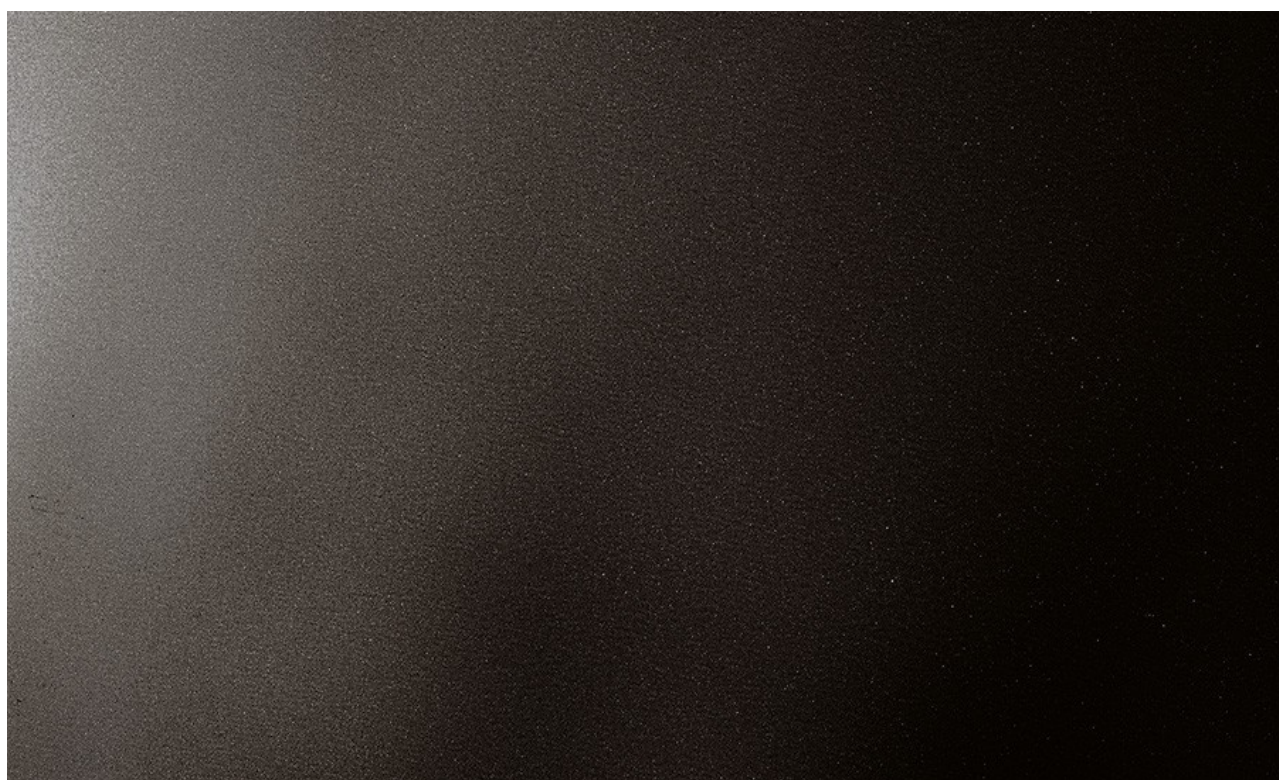

ONYX



AZUR

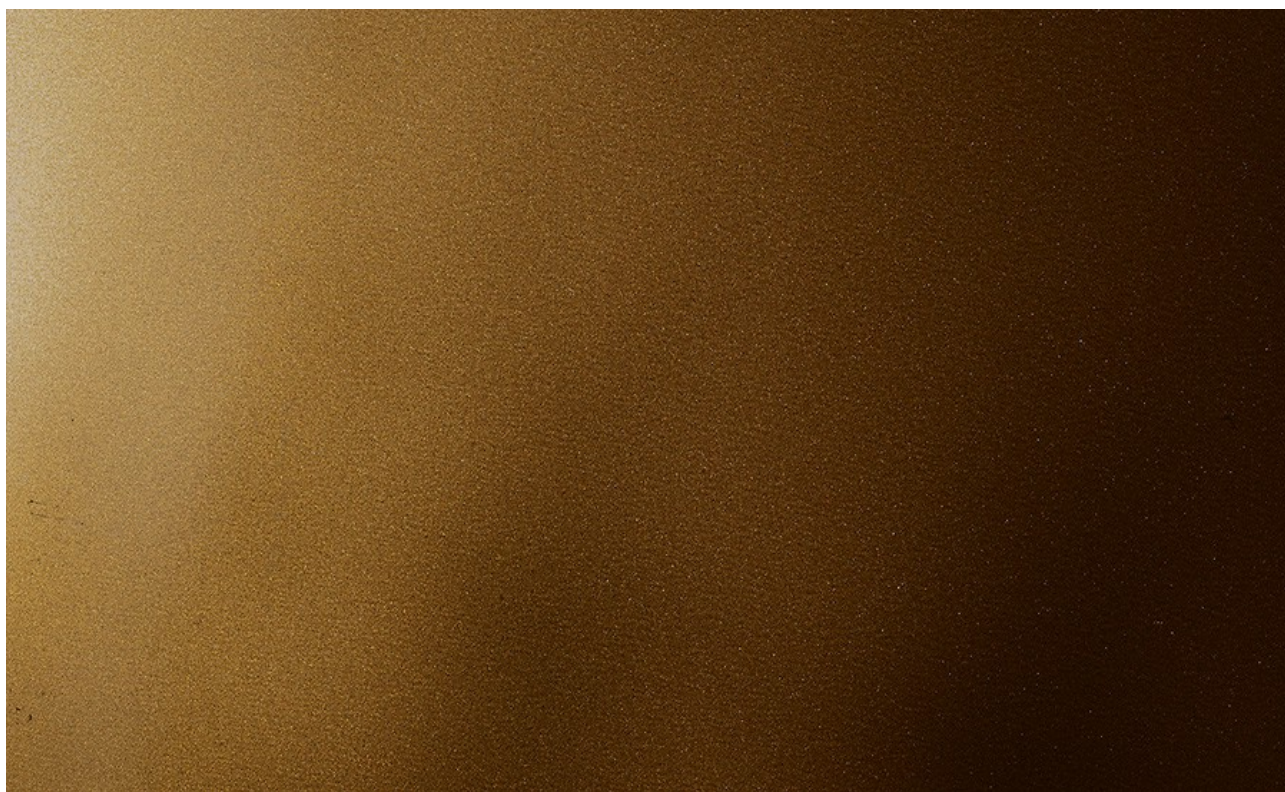

SIENA



GOLD

For additional info please visit: www.industry.arcelormittal.com